



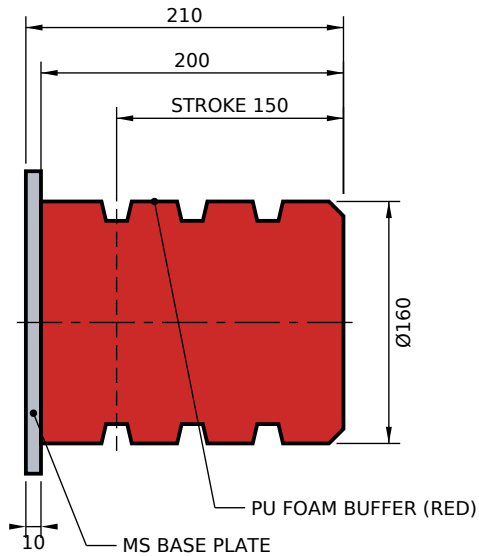

PU BUFFER - BASE PLATE MOUNT



VIEW FROM STRIKER END

Technical Parameters

Buffer diameter	Ø160	mm
Buffer height	200	mm
Stroke (max. deflection)	150	mm
Energy capacity	4.019	kNm
Max. buffer force	169	kN
Base plate	200 sq x 10 thk	mm
Mounting holes	4 x Ø18 on 160 sq	mm
Buffer material	Polyurethane foam	
Base plate material	MS, painted	

NOTES

- General arrangement for customer approval - not for manufacture.
- Dashed line = striker face at maximum deflection.
- Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
- Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
- Operating temperature -20 to +80 °C.
- Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: PU red / plate painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE					TITLE: JHQ-C-12 POLYURETHANE FOAM CRANE BUFFER - GA
DRAWN	PARESH ADAVANI				09-09-22					
CHK'D										
APPV'D	PARESH ADAVANI				11-09-22					
MFG										
Q.A							DWG NO.		A4	
AT/GA/JHQC/12										
MATERIAL: PU foam, MS base plate			WEIGHT:			SCALE: 1:5		SHEET 1 OF 1		