
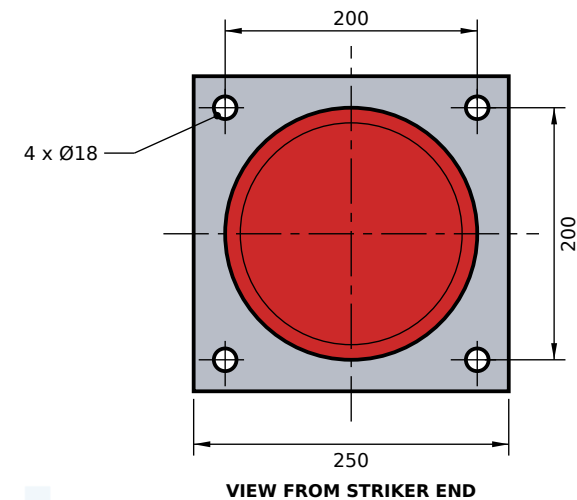


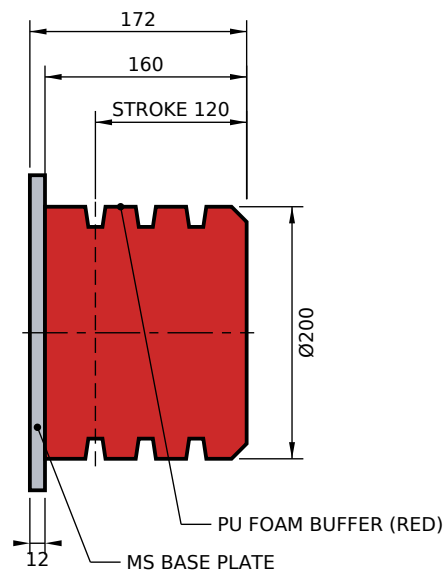

PU BUFFER - BASE PLATE MOUNT

Technical Parameters

Buffer diameter	Ø200	mm
Buffer height	160	mm
Stroke (max. deflection)	120	mm
Energy capacity	5.024	kNm
Max. buffer force	265	kN
Base plate	250 sq x 12 thk	mm
Mounting holes	4 x Ø18 on 200 sq	mm
Buffer material	Polyurethane foam	
Base plate material	MS, painted	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Dashed line = striker face at maximum deflection.
3. Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
4. Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
5. Operating temperature -20 to +80 °C.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: PU red / plate painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A																											
<table><tr><td></td><td>NAME</td><td>SIGNATURE</td><td>DATE</td></tr><tr><td>DRAWN</td><td>PARESH ADAVANI</td><td></td><td>11-09-22</td></tr><tr><td>CHK'D</td><td></td><td></td><td></td></tr><tr><td>APPV'D</td><td>PARESH ADAVANI</td><td></td><td>13-09-22</td></tr><tr><td>MFG</td><td></td><td></td><td></td></tr><tr><td>Q.A</td><td></td><td></td><td></td></tr></table>									NAME	SIGNATURE	DATE	DRAWN	PARESH ADAVANI		11-09-22	CHK'D				APPV'D	PARESH ADAVANI		13-09-22	MFG				Q.A				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in					
									NAME	SIGNATURE	DATE																										
								DRAWN	PARESH ADAVANI		11-09-22																										
								CHK'D																													
								APPV'D	PARESH ADAVANI		13-09-22																										
MFG																																					
Q.A																																					
TITLE:								JHQ-C-13 POLYURETHANE FOAM CRANE BUFFER - GA DWG NO. AT/GA/JHQC/13 A4																													
MATERIAL: PU foam, MS base plate						WEIGHT:		SCALE: 1:6		SHEET 1 OF 1																											