



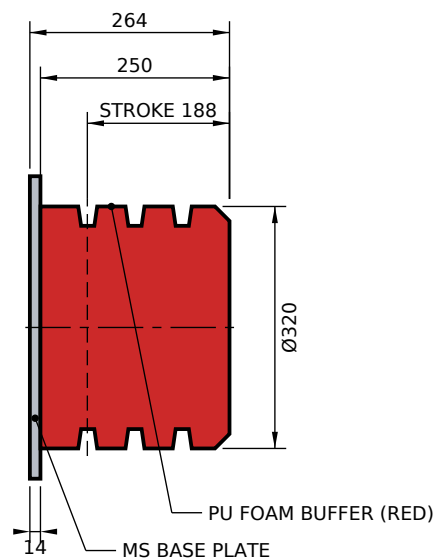

### PU BUFFER - BASE PLATE MOUNT

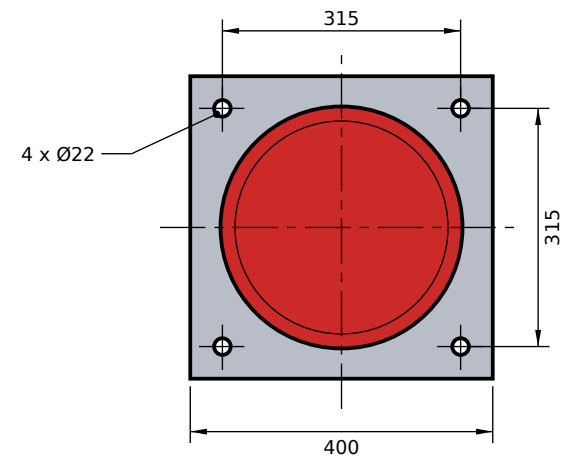

## Technical Parameters

|                          |                   |     |
|--------------------------|-------------------|-----|
| Buffer diameter          | Ø320              | mm  |
| Buffer height            | 250               | mm  |
| Stroke (max. deflection) | 188               | mm  |
| Energy capacity          | 20.096            | kNm |
| Max. buffer force        | 675               | kN  |
| Base plate               | 400 sq x 14 thk   | mm  |
| Mounting holes           | 4 x Ø22 on 315 sq | mm  |
| Buffer material          | Polyurethane foam |     |
| Base plate material      | M5, painted       |     |

## NOTES

1. General arrangement for customer approval - not for manufacture.
2. Dashed line = striker face at maximum deflection.
3. Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
4. Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
5. Operating temperature -20 to +80 °C.
6. Selection: [www.cranebuffer.com](http://www.cranebuffer.com) | [impactcal.netlify.app](http://impactcal.netlify.app)

|                                                                                                                                                                                             |  |  |  |                                   |  |                                   |  |                                                                           |  |               |  |                      |  |              |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|-----------------------------------|--|-----------------------------------|--|---------------------------------------------------------------------------|--|---------------|--|----------------------|--|--------------|--|
| UNLESS OTHERWISE SPECIFIED:<br>DIMENSIONS ARE IN MILLIMETERS<br>GENERAL ARRANGEMENT - OUTLINE ONLY<br>DIMENSIONS SUBJECT TO CHANGE<br>WITHOUT PRIOR NOTICE<br>PROJECTION: FIRST ANGLE       |  |  |  | FINISH:<br>PU red / plate painted |  | DEBUR AND<br>BREAK SHARP<br>EDGES |  | DO NOT SCALE DRAWING                                                      |  | REVISION<br>A |  |                      |  |              |  |
| <div></div> <div><b>ADONI TECH</b><br/>Addl. MIDC, Kodoli, Satara 415004<br/>www.adonitech.co.in</div> |  |  |  |                                   |  |                                   |  | TITLE:                                                                    |  |               |  |                      |  |              |  |
|                                                                                                                                                                                             |  |  |  |                                   |  |                                   |  | <div><b>JHQ-C-19</b></div> <div>POLYURETHANE FOAM CRANE BUFFER - GA</div> |  |               |  |                      |  |              |  |
|                                                                                                                                                                                             |  |  |  |                                   |  |                                   |  |                                                                           |  |               |  | DWG NO.              |  | <b>A4</b>    |  |
|                                                                                                                                                                                             |  |  |  |                                   |  |                                   |  |                                                                           |  |               |  | <b>AT/GA/JHQC/19</b> |  |              |  |
|                                                                                                                                                                                             |  |  |  |                                   |  |                                   |  |                                                                           |  |               |  |                      |  |              |  |
|                                                                                                                                                                                             |  |  |  |                                   |  |                                   |  | MATERIAL: PU foam, MS base plate                                          |  | WEIGHT:       |  | SCALE: 1:10          |  | SHEET 1 OF 1 |  |