


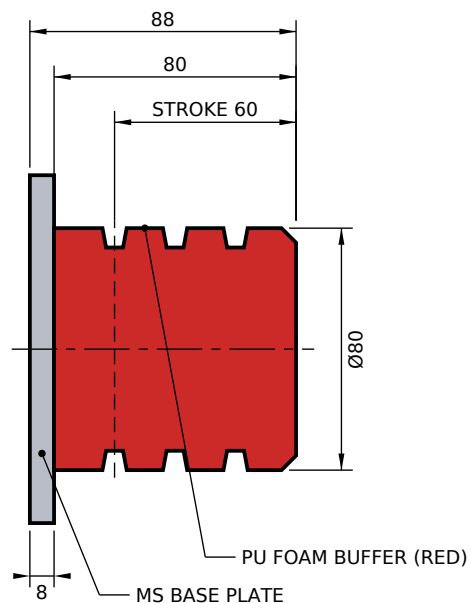


### PU BUFFER - BASE PLATE MOUNT

## Technical Parameters

|                          |                   |     |
|--------------------------|-------------------|-----|
| Buffer diameter          | Ø80               | mm  |
| Buffer height            | 80                | mm  |
| Stroke (max. deflection) | 60                | mm  |
| Energy capacity          | 0.4               | kNm |
| Max. buffer force        | 42                | kN  |
| Base plate               | 115 sq x 8 thk    | mm  |
| Mounting holes           | 4 x Ø12 on 85 sq  | mm  |
| Buffer material          | Polyurethane foam |     |
| Base plate material      | MS, painted       |     |

## NOTES

1. General arrangement for customer approval - not for manufacture.
2. Dashed line = striker face at maximum deflection.
3. Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
4. Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
5. Operating temperature -20 to +80 °C.
6. Selection: [www.cranebuffer.com](http://www.cranebuffer.com) | [impactcal.netlify.app](http://impactcal.netlify.app)

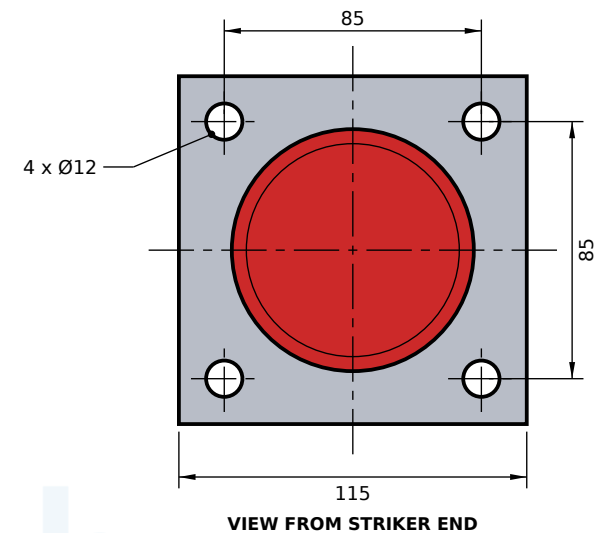

|                                                                                                                                                                                                                                                                                                                          |  |                                   |  |                                   |  |                                                                  |  |                      |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------|--|-----------------------------------|--|------------------------------------------------------------------|--|----------------------|--|
| UNLESS OTHERWISE SPECIFIED:<br>DIMENSIONS ARE IN MILLIMETERS<br>GENERAL ARRANGEMENT - OUTLINE ONLY<br>DIMENSIONS SUBJECT TO CHANGE<br>WITHOUT PRIOR NOTICE<br>PROJECTION: FIRST ANGLE                                                                                                                                    |  | FINISH:<br>PU red / plate painted |  | DEBUR AND<br>BREAK SHARP<br>EDGES |  | DO NOT SCALE DRAWING                                             |  | REVISION<br><b>A</b> |  |
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="width: 40%;"> <p><b>adoniTech</b></p> <p>Addl. MIDC, Kodoli, Satara 415004</p> <p><a href="http://www.adonitech.co.in">www.adonitech.co.in</a></p> </div> <div style="width: 55%;"> <p><b>ADONI TECH</b></p> </div> </div> |  |                                   |  |                                   |  |                                                                  |  |                      |  |
|                                                                                                                                                                                                                                                                                                                          |  |                                   |  |                                   |  | TITLE:                                                           |  |                      |  |
|                                                                                                                                                                                                                                                                                                                          |  |                                   |  |                                   |  | <p><b>JHQ-C-2</b></p> <p>POLYURETHANE FOAM CRANE BUFFER - GA</p> |  |                      |  |
|                                                                                                                                                                                                                                                                                                                          |  |                                   |  |                                   |  | DWG NO.                                                          |  |                      |  |
|                                                                                                                                                                                                                                                                                                                          |  |                                   |  |                                   |  | <p><b>AT/GA/JHQC/2</b></p>                                       |  |                      |  |
| MATERIAL: PU foam, MS base plate                                                                                                                                                                                                                                                                                         |  | WEIGHT:                           |  | SCALE: 1:2.5                      |  | SHEET 1 OF 1                                                     |  |                      |  |