


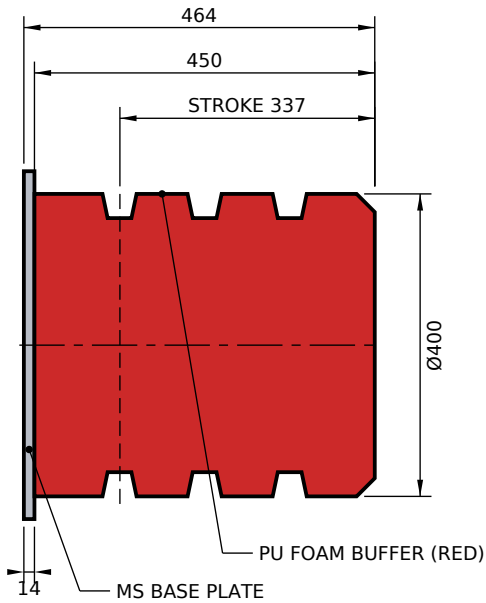


PU BUFFER - BASE PLATE MOUNT

Technical Parameters

Buffer diameter	Ø400	mm
Buffer height	450	mm
Stroke (max. deflection)	337	mm
Energy capacity	56.5	kNm
Max. buffer force	1054	kN
Base plate	460 sq x 14 thk	mm
Mounting holes	4 x Ø22 on 370 sq	mm
Buffer material	Polyurethane foam	
Base plate material	MS, painted	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Dashed line = striker face at maximum deflection.
3. Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
4. Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
5. Operating temperature -20 to +80 °C.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

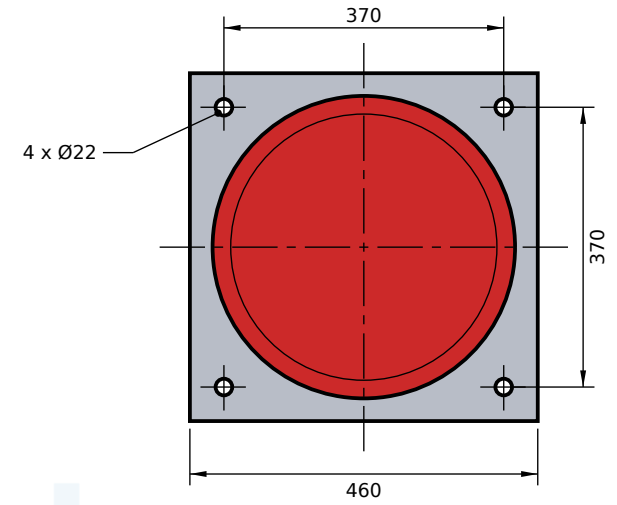

VIEW FROM STRIKER END

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: PU red / plate painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in					
	NAME		SIGNATURE		DATE		TITLE: JHQ-C-23 POLYURETHANE FOAM CRANE BUFFER - GA				
DRAWN	PARESH ADAVANI				01-10-22						
CHK'D											
APPV'D	PARESH ADAVANI				03-10-22						
MFG											
Q.A							DWG NO. AT/GA/JHQC/23		A4		
MATERIAL: PU foam, MS base plate				WEIGHT:				SCALE: 1:10		SHEET 1 OF 1	