
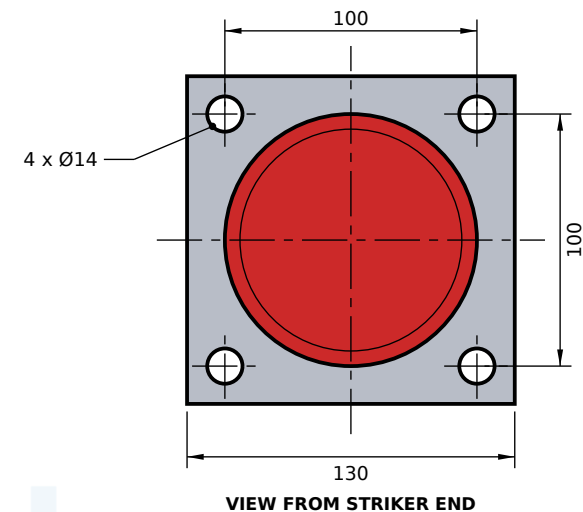


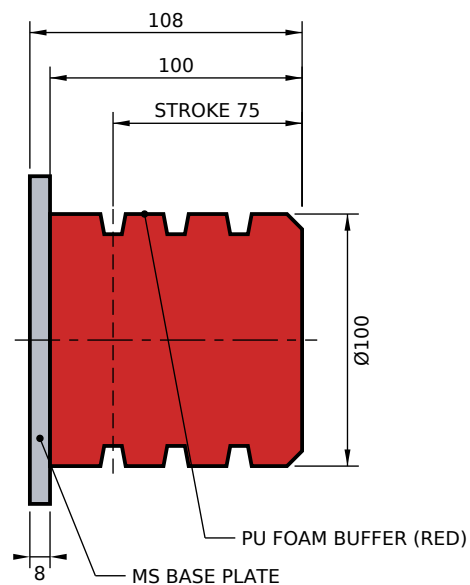

PU BUFFER - BASE PLATE MOUNT

Technical Parameters

Buffer diameter	Ø100	mm
Buffer height	100	mm
Stroke (max. deflection)	75	mm
Energy capacity	0.785	kNm
Max. buffer force	66	kN
Base plate	130 sq x 8 thk	mm
Mounting holes	4 x Ø14 on 100 sq	mm
Buffer material	Polyurethane foam	
Base plate material	MS, painted	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Dashed line = striker face at maximum deflection.
3. Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
4. Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
5. Operating temperature -20 to +80 °C.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE			FINISH: PU red / plate painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A																										
<table><tr><td></td><td>NAME</td><td>SIGNATURE</td><td>DATE</td></tr><tr><td>DRAWN</td><td>PARESH ADAVANI</td><td></td><td>26-08-22</td></tr><tr><td>CHK'D</td><td></td><td></td><td></td></tr><tr><td>APPV'D</td><td>PARESH ADAVANI</td><td></td><td>28-08-22</td></tr><tr><td>MFG</td><td></td><td></td><td></td></tr><tr><td>Q.A</td><td></td><td></td><td></td></tr></table>								NAME	SIGNATURE	DATE	DRAWN	PARESH ADAVANI		26-08-22	CHK'D				APPV'D	PARESH ADAVANI		28-08-22	MFG				Q.A				 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
								NAME	SIGNATURE	DATE																									
							DRAWN	PARESH ADAVANI		26-08-22																									
							CHK'D																												
							APPV'D	PARESH ADAVANI		28-08-22																									
							MFG																												
Q.A																																			
TITLE:																																			
JHQ-C-5 POLYURETHANE FOAM CRANE BUFFER - GA																																			
DWG NO.					A4																														
AT/GA/JHQC/5																																			
MATERIAL: PU foam, MS base plate			WEIGHT:		SCALE: 1:3			SHEET 1 OF 1																											